PRODUCT DATASHEET

LED Line

INDUSTRIAL LIGHTING

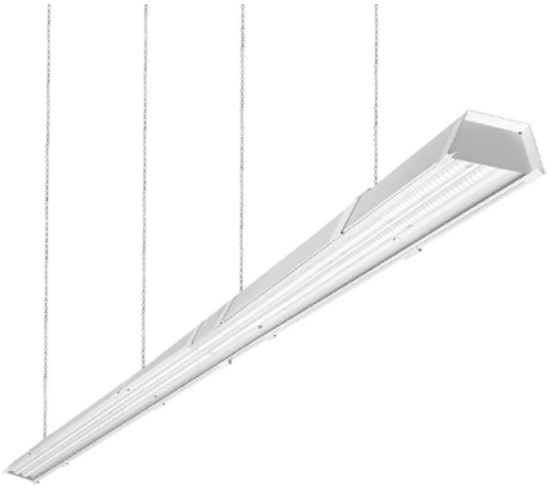

CHARACTERISTIC

Supply voltage:	230V
Frequency:	50Hz
Ingress protection IP:	IP20
Impact resistance IK:	IK07
Rated power:	22W, 30W, 60W
Electrical protection class:	I
Dimensions:	1405/110/70mm
Material of the body:	Powder coated steel
Colour temperature:	4000K
Colour of the body:	White
Luminous flux* :	max 9650lm
Material of the diffuser:	PMMA
Type of the diffuser:	Opal

* Initial, tolerance +/- 10%

SPECIFICATION

System of suspended industrial lighting line with integrated energy-saving LED GO! light source. Through-wiring and in-line connector enable quick assembly of the fitting. Equipped with an unique panel mounting system facilitating the ease of installation of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

APPLICATION

Suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.

FEATURES

Standard Deviation Colour Matching (SDCM): ≤3

LED Line

INDUSTRIAL LIGHTING

AVAILABLE OPTIONS

Contact us for individual specification sheets for your chosen option

Index	Rated power	Colour temperature	Luminous flux **	Material of the diffuser	Type of the diffuser	DALI	Nominal radiation angle
INT150746	22W	4000K	3000lm	PMMA	Frosted		20
INT150753	22W	4000K	3000lm	PMMA	Frosted	YES	20
INT150838	22W	4000K	3150lm	PMMA	Frosted	YES	Asymmetric
INT150821	22W	4000K	3150lm	PMMA	Frosted		Asymmetric
INT150777	22W	4000K	3300lm	PMMA	Frosted	YES	45
INT150760	22W	4000K	3300lm	PMMA	Frosted		45
INT150791	22W	4000K	3400lm	PMMA	Frosted	YES	60
INT150814	22W	4000K	3500lm	PMMA	Frosted	YES	90
INT150784	22W	4000K	3400lm	PMMA	Frosted		60
INT150807	22W	4000K	3500lm	PMMA	Frosted		90
INT150852	30W	4000K	4000lm	PMMA	Frosted	YES	20
INT150845	30W	4000K	4000lm	PMMA	Frosted		20
INT150937	30W	4000K	4150lm	PMMA	Frosted	YES	Asymmetric
INT150920	30W	4000K	4150lm	PMMA	Frosted		Asymmetric
INT150869	30W	4000K	4350lm	PMMA	Frosted		45
INT150876	30W	4000K	4350lm	PMMA	Frosted	YES	45
INT150883	30W	4000K	4450lm	PMMA	Frosted		60
INT150890	30W	4000K	4450lm	PMMA	Frosted	YES	60
INT150913	30W	4000K	4550lm	PMMA	Frosted	YES	90
INT151057	60W	4000K	8400lm	PMMA	Frosted	YES	20
INT150906	30W	4000K	4550lm	PMMA	Frosted		90
INT151040	60W	4000K	8400lm	PMMA	Frosted		20
INT151200	60W	4000K	8700lm	PMMA	Frosted	YES	Butterfly
INT151194	60W	4000K	8700lm	PMMA	Frosted		Butterfly
INT151187	60W	4000K	8800lm	PMMA	Frosted	YES	Asymmetric
INT151071	60W	4000K	9350lm	PMMA	Frosted	YES	45
INT151170	60W	4000K	8800lm	PMMA	Frosted		Asymmetric
INT151064	60W	4000K	9350lm	PMMA	Frosted		45
INT151095	60W	4000K	9500lm	PMMA	Frosted	YES	60
INT151088	60W	4000K	9500lm	PMMA	Frosted		60
INT151163	60W	4000K	9650lm	PMMA	Frosted	YES	90
INT151156	60W	4000K	9650lm	PMMA	Frosted		90

** Initial, tolerance +/- 10%

Revision date: 2017-07-31

The luminaire complies with the EU ROHS Directive 2011/65/UE.

This product is a subject to electric and electronic waste equipment regulations (WEEE).

22/2017